



Review

A Review of Battery State of Health Estimation Methods: Hybrid Electric Vehicle Challenges

Nassim Noura ^{1,*}, Loïc Boulon ¹ and Samir Jemeï ^{2,3}

¹ Hydrogen Research Institute, Université du Québec à Trois-Rivières, Trois-Rivières, QC G8Z 4M3, Canada; Loic.boulon@uqtr.ca

² FEMTO-ST, CNRS, Université Bourgogne Franche-Comté, rue Ernest Thierry Mieg, F-90010 Belfort, France; samir.jemei@univ-fcomte.fr

³ FCLAB, Université Bourgogne Franche-Comté, rue Ernest Thierry Mieg, F-90010 Belfort, France

* Correspondence: Nassim.noura@uqtr.ca; Tel.: +1-(438)-223-4240

Received: 22 September 2020; Accepted: 14 October 2020; Published: 16 October 2020



Abstract: To cope with the new transportation challenges and to ensure the safety and durability of electric vehicles and hybrid electric vehicles, high performance and reliable battery health management systems are required. The Battery State of Health (SOH) provides critical information about its performances, its lifetime and allows a better energy management in hybrid systems. Several research studies have provided different methods that estimate the battery SOH. Yet, not all these methods meet the requirement of automotive real-time applications. The real time estimation of battery SOH is important regarding battery fault diagnosis. Moreover, being able to estimate the SOH in real time ensure an accurate State of Charge and State of Power estimation for the battery, which are critical states in hybrid applications. This study provides a review of the main battery SOH estimation methods, enlightening their main advantages and pointing out their limitations in terms of real time automotive compatibility and especially hybrid electric applications. Experimental validation of an online and on-board suited SOH estimation method using model-based adaptive filtering is conducted to demonstrate its real-time feasibility and accuracy.

Keywords: review; online parameter identification; recursive least square; battery internal resistance

1. Introduction

With climate change, resource depletion, greenhouse gases, it is obvious that the environmental situation of the planet has reached a critical stage. In order to cope with some of the crises that the planet is facing, a tremendous change in the transportation field is necessary. As a matter of fact, hybridization and electrification of vehicles' powertrains have witnessed a huge growth in recent years. A key component of this electrified powertrain is the battery. Therefore, battery technologies have seen a consequent development, especially with Lithium Ion Batteries (LIB) [1]. Since their emergence in the early 1990's, the LIB cell represents the most promising and fastest growing battery technology in both low and high-power applications. A high specific energy (150–280 Wh·g⁻¹) [2] combined with a high specific power (200–300 W·kg⁻¹) makes this technology the most attractive one for electrified powertrains. BCC Research reports that the LIB market is expected to reach USD 47.4 billion in 2023 with 15.8% annual growth [3].

The growing market of Electric Vehicles (EV) and Hybrid Electric Vehicles (HEV) leads to a huge demand on high performing LIB but most of all long-lasting ones. Batteries are complex electrochemical components with nonlinear behaviors [4]. Their performances depend heavily on internal and external conditions (aging, temperature, etc.). In order to keep track of these performances and battery states, an LIB pack is always equipped with a Battery Health Management system, part of the Battery

Management System (BMS). The BMS is the main battery control system. Its role is to provide safe use of the battery and estimate, as accurately as possible, the main states of the battery system such as its State of Health (SOH) State of Power (SOP) and State of Charge (SOC) [5,6]. The SOC provides information about the current amount of energy stored in the battery. The SOP indicates the battery capability of providing the required power [7,8]. Meanwhile, the SOH is a figure of merit that indicates the battery level of degradation [9,10]. Due to the nonlinear complex behavior of the battery, estimating battery SOC, SOP and SOH can be very challenging, yet necessary. The battery SOH is attracting more and more attention. Estimating the battery SOH in real time is very important for automotive applications. It allows battery fault diagnosis and help prevent hazardous accidents. It provides accurate knowledge on the battery performance that can help manage the energy distribution in HEV and improve their consumption and lifetime [11]. Most of all the real time SOH estimation allows an accurate estimation of the battery SOC and SOP. Additionally, it can be useful in terms of maintenance and replacement schedules.

Different approaches are used for battery state estimations. Regarding battery SOH estimation, there are three main indicators that define this state, the battery internal resistance, the battery impedance and its capacity. The battery capacity reflects the amount of energy the battery can store, while the internal resistance and impedance are indicators of its power capability. When it comes to hybrid applications, the battery's power is of great interest, compared to EV where the battery energy is more crucial. Their health condition is therefore seen through power indicators such as the internal resistance and the impedance. These parameters change over the battery lifetime due to aging mechanisms. The battery SOH can be calculated using the ratio between the actual indicator value (capacity, impedance or resistance) and its initial one. At its End of Life (EoL), considering vehicular applications, the battery capacity can fade up to 20% while the internal resistance increases up to 160% of its initial value [5] Therefore, tracking their changes is necessary to estimate the battery SOH. This tracking is, as mentioned previously, a very challenging task since the changes in both battery resistance and battery capacity find their origins in many different causes but also in the interactions between them. Several studies tracked back these origins in terms of internal battery degradation [12]. The main causes appear to be the Solid Electrolyte Interface (SEI) formation [13,14] with lithium metal plating and loss of lithium in the active carbon area of the battery [4,15]. Moreover, changes in these SOH indicators can be caused by external conditions such as temperature changes and SOC level. Yet, these variations are often temporary and most of the time reversible; they don't reflect adequately the continuous degradation of the battery health.

Considerable efforts are invested in battery SOH estimation to keep track of their performances and their remaining useful lifetime. Different methods are deployed to accurately identify the previously cited SOH indicators and reach an accurate battery SOH estimation. These methods can be listed in three main categories, shown in Figure 1: Experimental methods, Model-based methods and, last but not least, Machine Learning methods. Machine learning methods stand as a combination of experimental methods and model-based ones; as a matter of fact, they make use of example data recorded from real vehicles' BMS as input data for training the machine learning model and extracting the battery degradation level. Several review studies have listed these methods pointing out their advantages and their drawbacks [16–19].

Regarding automotive applications, operating conditions change in real time (temperature for instance), making the real time feasibility of these identification processes very challenging. The model-based methods and the machine learning-based ones can meet the requirements of online and onboard applications. The experimental-based methods require a considerable amount of time and a high cost to be conducted which makes them less suited for real time applications [16,20]. Since the list of existing methods in terms of SOH estimation provided in the literature is very wide, a qualitative review that focuses on the key automotive challenges is necessary. The main purpose of this review is to highlight the strengths and weaknesses of the latest and main battery SOH estimation techniques in terms of real time applications. An experimental validation of the presented, real time compatible,

SOH estimation methods is conducted. This experimental validation takes into consideration a real driving cycle with a dynamic current profile. The results of this experimental validation are used to highlight the compatibility of these methods with automotive applications.

Therefore, this paper is organized as follows, the next section presents a review of the main experimental-based SOH estimation methods. Model-based SOH estimation methods are presented in Section 3. In Section 4, machine learning estimation methods are reviewed; they stand as a combination of experimental and model-based methods. Experimental testing and validation results are provided and analyzed in Section 5. Finally, a conclusion is made in Section 6.

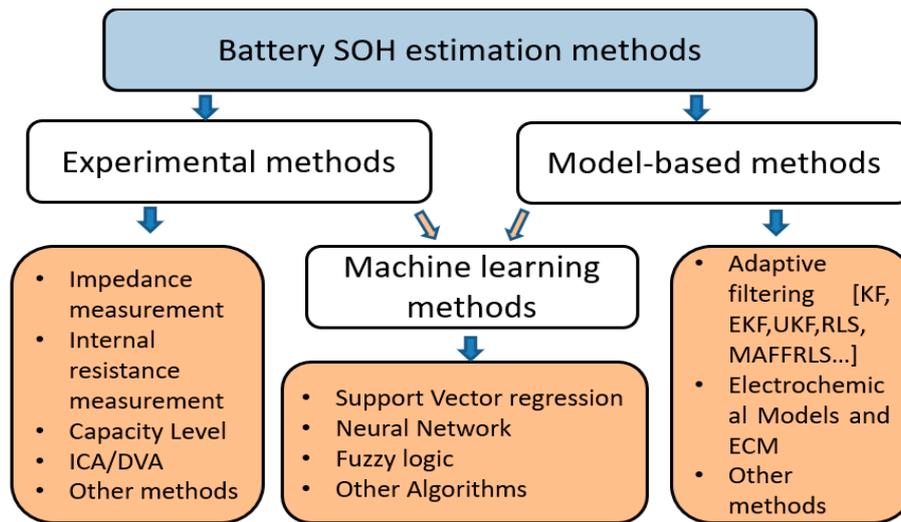


Figure 1. State of Health (SOH) estimation methods.

2. Review of Battery State of Health (SOH) Estimation Experimental Methods

Experimental methods are, most of the time, conducted in laboratories since they require specific equipment and are often time consuming. They are based on collecting data and measurements that can be used to understand and evaluate the battery aging behavior. The main experimental methods to estimate the battery SOH are presented in this section.

2.1. Battery’s Internal Resistance Measurement

The battery’s internal resistance is considered an important SOH indicator that defines the voltage drop when a current is applied to the battery. This parameter is heavily impacted by aging and degradation. Its value increases when the battery SOH decreases. Therefore, it is often used as a strong indicator to estimate the battery SOH. The literature shows how several authors investigated techniques to measure this internal resistance. The most commonly used method is called current pulse [21–23]. It is based on the Ohm’s Law. It measures the voltage drop of the battery for a given current, and then calculates the battery’s internal resistance, as follows [24]:

$$R_b(SOC, T) = \frac{OCV(SOC, T) - V_{bat}(SOC, T)}{I_{pulse}} \tag{1}$$

where R_b stands for the battery internal resistance, OCV its Open Circuit Voltage, V_{bat} its voltage and I_{pulse} the current applied. This method is widely used in laboratories to define the battery internal resistance behavior in different working conditions with a very satisfying accuracy. However, this method is more suitable for stationery and laboratory applications, due to its time-consuming process (approximately one hour of battery relaxation to reach the equilibrium before measuring the OCV).

In [25], the battery internal resistance is measured using the energy loss caused by Joule's Law, which is directly linked to this resistance by the following equation:

$$\frac{dQ_{joule}}{dt} = I_{bat}^2 \cdot R_b \quad (2)$$

where Q_{joule} represents the heat generated by the battery. This method is often applied by use of a calorimeter to measure the heat loss during the battery operation. This method is mostly applied in laboratories conditions due to its high cost and consequent space requirement (use of an additional calorimeter). The third common method to measure the battery internal resistance is the Electrochemical Impedance Spectroscopy (EIS) as shown in [26] which allows the of calculation resistance from the measured impedance. This method will be presented in detail in the next chapter. Measuring the internal resistance of a battery experimentally is very accurate yet conducting these measurements on board can be challenging.

2.2. Battery's Internal Impedance Measurement

The internal impedance of a battery represents the combination of its internal resistance and reactance. It has been established and proven that the internal impedance of a battery tends to increase with age. Therefore, it is considered a battery SOH indicator. The most frequent method to measure impedance is the EIS [27–29]. It is a non-destructive method that measures the impedance of an electric system by applying a sinusoidal AC current and measuring the response output voltage. The impedance is measured as a function of the frequency. The main advantages of this technique are in its ability to help identify accurately the ageing phenomenon that occurs in the battery. As a matter of fact, in [30], the author, through EIS, investigates two main phenomenon of battery ageing. The first one appears to be the charge transfer at the positive electrode. Meanwhile, the second one is caused by the lithium ion transport across the SEI layer. Another ageing phenomenon is identified in [4], where the author makes use of EIS to point out the effect of cycling and storage under field operating conditions on the LIB's impedance. In [31], the author introduces an innovative concept for EIS. The process is conducted in real time using a control platform and an efficient power converter, which increase its cost. It has been made clear, in the literature, that this EIS technique is very convincing in measuring the battery impedance but also identifying its ageing mechanisms. Yet, the main drawbacks of this measurement technique are in the fact that it requires a long time to be performed and a particularly stable environment.

2.3. Battery Energy Level

The capacity is a characteristic that indicates the total amount of energy that can be stored in a battery. This characteristic is known to decrease with battery aging. Therefore, experimentally measuring this capacity fading through time is one of the most accurate ways to estimate the battery SOH. In [32], the author conducted several charging/discharging cycles of a lithium ion battery until its EoL. The main idea behind this study is to identify the battery charging capacity depending on its voltage for different degradation levels (Cycle Numbers). In [33], the author estimated the battery capacity level through experimental testing taking into consideration different temperature conditions. The battery was tested for 800 cycles under 25 °C and 40 °C. Offline data experimentally measured were then used to setup an online SOH estimation method. However, these experimental methods can only be conducted offline under laboratory conditions where a battery is tested until its EoL.

2.4. Other Methods

Other methods can be found in the literature that allow battery SOH estimation using experimental testing. For example, the battery SOH can be investigated by analyzing the evolution of its incremental capacity (IC) and differential voltage (DV) curves [34]. In fact, these parameters change with battery

aging; therefore, they can be used to estimate the battery SOH through experimental testing as shown in [35]. These Incremental Capacity Analysis (ICA) and Differential Voltage Analysis (DVA) methods are time consuming since their curves are obtained under low current (C/20 for instance). In [36], data based on calendar aging were gathered over 11 months to make this estimation feasible and they only cover some specific operating conditions. The cycle number counting method as its name indicates consists of counting the number of cycles that the battery has experienced and comparing it with the number provided by the manufacturer to estimate the battery SOH. This cycle counting method takes into account an important parameter, the Depth of Discharge (DOD). The number of cycles that defines the battery's Remaining Useful Life (RUL) depends then on its SOH and on the DOD considered. Ultrasonic inspection is another method that detects the inner changes inside the battery due to its aging, by use of a wave generating test bench [37]. SOH estimation can be accomplished using destructive methods [16] exclusively conducted in laboratory conditions. They investigate the changes of structure inside the battery using techniques such as X ray diffraction [38]. The reviewed experimental methods are listed in Table 1 with their advantages and disadvantages.

Table 1. Experimental-based methods.

Methods	Key Advantages	Disadvantages
Internal resistance measurements [21–26]	<ul style="list-style-type: none"> ➤ Direct and simple method ➤ Accurate 	<ul style="list-style-type: none"> ➤ Not suited for online estimation ➤ Time consuming
Internal impedance measurements [27–31]	<ul style="list-style-type: none"> ➤ Accurate ➤ Provide knowledge about the battery degradation causes 	<ul style="list-style-type: none"> ➤ Relies on information about the battery chemistry
Energy level [32,33]	<ul style="list-style-type: none"> ➤ Accurate ➤ Fast 	<ul style="list-style-type: none"> ➤ Not feasible when the battery is operating (requires the battery to be fully charged)

3. Review of Model-Based SOH Estimation METHODS

The SOH, as mentioned previously, is a figure of merit that indicates the level of degradation of the battery. Its calculation, however, cannot be conducted through direct measurements. It needs to be estimated using SOH indicators that are the battery capacity, its resistance or its impedance (some research lists the battery impedance and internal resistance as the same indicator, yet since the methods used to estimate them are different this work has listed them separately). Due to their real time feasibility, a huge interest, in automotive research, has been given lately to model-based methods for estimating these indicators and evaluating the battery SOH. These methods use models that describe the battery behavior considering SOH indicators. In order to estimate the battery states and their performances, these indicators are identified. Several methods are provided in the literature that allow the identification of these indicators. The main model-based methods for SOH estimations are reviewed in this section.

3.1. Kalman-Based FILTERS

A common model-based method to estimate the battery SOH is adaptive filtering. Several adaptive algorithms have been used in the literature to identify in real time the parameters of different battery Equivalent circuit models (ECM), which includes the battery internal resistance, in order to track the battery SOC and SOH. Kalman filter-based methods (Kalman Filter (KF), Extended Kalman Filter (EKF), Unscented Kalman Filter (UKF), Dual EKF, etc.) have been widely used to estimate battery states and parameters [39–42]. In a series of three papers [43–45], the author investigates the SOC and parameter estimation of a lithium ion polymer battery pack using Kalman Filtering. The benefits of using EKF over the classical KF stand in the linearization process to deal with nonlinear models as explained in [43], the first

paper of this series. In [46], the author presents a battery state and parameter estimation based on a UKF algorithm. Through the estimation of the battery's internal resistance, the SOH is accurately predicted.

3.2. Least Square-Based FILTERS

Other widely used algorithms in adaptive filtering are the Least Square-based ones [47–51]. A lot of attention has been given recently to these algorithms and especially to the Recursive Least Square (RLS) due to its simple implementation and accuracy. This algorithm gives an accurate estimation of battery parameters that are directly linked to battery states such as the Open Circuit Voltage (OCV) for battery SOC, and internal resistance for battery SOH. This identification process and state estimation have been investigated in [52] where the importance of the battery model is clearly pointed out. The author in [48] indicates the high performances of an improved RLS-based algorithm, the Multi Adaptive Forgetting Factors RLS (MAFFRLS). In the MAFFRLS algorithm, the forgetting factor is optimized through Particle Swarm Optimization (PSO) algorithm to reach a higher accuracy parameter estimation.

3.3. Observers

Observers have also been used as an adaptive identification method for SOH estimation [53,54]. In [54], the author uses a sliding mode observer to estimate both SOC and SOH for a lithium ion battery. The accuracy of this method is clearly presented alongside its robustness against modeling error and temperature variations

3.4. Simplified Electrochemical Models

Electrochemical Models (EM) are complex models that tend to represent the battery behavior accurately [55]. They are often based on nonlinear differential equations. Yet those models can be simplified and combined with adaptive filtering instead of ECM for SOH estimation. The identification of electrochemical parameters allows the SOH estimation. In [56], the author simplifies a battery EM before identifying two battery SOH indicators, the internal resistance and the diffusion time, using online recursive parameter identification. In [57], the author introduces a high level battery EM that predicts the remaining capacity of a battery SOC. This EM takes into account the effects of the temperature and the cycle aging. This technique can be used to estimate the battery maximum capacity level to reach the battery SOH. The main drawbacks of these EMs are in the complexity of the equations that they require. Satisfying accuracy in predicting the battery behavior can be reached using less complex models such as ECMs.

3.5. Other Methods

The battery SOH can also be estimated using other model-based methods than the ones presented before. One of the most frequent is the use of optimization algorithms to identify model parameters that are SOH indicators. In [58], the author investigates the correlation between the battery diffusion capacitance and its SOH through experimental measurements. Then, an optimization algorithm, a Genetic Algorithm (GA), is used to estimate the diffusion capacitance of a battery ECM. The main drawback of these optimization algorithms is their high computational time compared to other model-based estimation methods such as adaptive filtering.

These presented model-based methods benefit from an easy implementation and a fast processing. They require simple structures and are relatively accurate and robust in terms of parameter identification. Their main limitation exists in the fact that they heavily rely on the used battery model and its accuracy and level of complexity. Compared to adaptive filters and observers, electrochemical models provide more physical meaning about the battery ageing process and allow the estimation of both the battery capacity and internal resistance. However, the structure of these models is relatively more complicated than the ECMs used for adaptive filtering and observer. Moreover, their computational time and cost are higher. The reviewed model-based methods are listed in Table 2 with their advantages and disadvantages.

Table 2. Model-based estimation methods.

Methods	Key Advantages	Disadvantages
Kalman Filter-based (KF) methods [39–46]	<ul style="list-style-type: none"> ➤ Accurate ➤ Error bounds ➤ Commonly used in the literature 	<ul style="list-style-type: none"> ➤ Only the improved versions (Extended KF Unscented KF) of this filter are valid for nonlinear system ➤ The improved versions are relatively complex, and their computational effort is high ➤ Require a high performances controller
Least square-based methods [47–52]	<ul style="list-style-type: none"> ➤ Precise ➤ Robust ➤ Simple structure 	<ul style="list-style-type: none"> ➤ Relies in terms of accuracy on the selected model ➤ Require a high performances controller
Observers [53,54]	<ul style="list-style-type: none"> ➤ Accurate ➤ Robust 	<ul style="list-style-type: none"> ➤ Require a high performances controller ➤ Higher computational cost than adaptive filters
Simplified Electrochemical models [55–57]	<ul style="list-style-type: none"> ➤ Accurate ➤ Describe the degradation phenomena that occurs inside the battery 	<ul style="list-style-type: none"> ➤ Requires high performances controller ➤ Complex structure with several parameters (linear and nonlinear ones). ➤ High computational effort

4. Review of Machine Learning Methods: A Combination of Models and Experimental Data

These methods represent a combination between experimental and model-based ones. In fact, they use training data, measurements and models in the learning process to estimate the battery SOH.

Several machine learning algorithms can be found in the literature to perform the battery SOH prognostics [32,59–63]. In [64], the author uses Support Vector Regression (SVR) to estimate the battery Remaining Useful Life (RUL) and takes it into consideration in the energy management strategy of a Fuel cell Hybrid Electric Vehicle (FC-HEV). This prognostic is carried out on-board the vehicle using example data measured in the laboratory but also real time measurements. This SVR algorithm is used in [65] to estimate the battery SOH using training data acquired offline through EIS. Another interesting machine learning method that is widely used in the literature is the fuzzy logic-based one. In [66], the author combines EIS and fuzzy logic data analysis to estimate the SOH of a Lead Acid battery. The Gaussian process algorithm is also often used in machine learning approaches; Khalegi et al. [67] make use of this algorithm and show its accuracy to trace the SOH of an LIB using training data from WLTC profiles. Neural Networks are one of the most popular algorithms used to process training data and measured data in machine learning. In [68], the author proposes an SOH estimation method based on a Back Propagation Neural Network (BPNN) based on the battery internal parameters and battery's interval capacity. The SOH estimation provided by this method has an error margin of (−1.5%, 1.5%). In [69], the author provides a SOH estimation method combining EIS measurements and Neural Networks. An improved Neural Network algorithm used in machine learning process is presented in [62] where the author compares an innovative extreme learning machine algorithm based on a single layer feed forward Neural Network to a traditional BPNN. This innovative algorithm produces better results in terms of operation speed and estimation accuracy than the traditional BPNN, however it requires an important amount of training data at different operating conditions. Another example of a Neural Network algorithm is given in [70] where the author introduces a variant

long-short-term memory Neural Network (LSTM-NN). This algorithm is tested experimentally and provides accurate results in terms of SOH estimation (RMS 0.0216) and RuL prediction (CE 0.0831). A Particle filter-based algorithm is used in [71] to setup a machine learning process for battery SOH estimation. The performances of the machine learning algorithms depend, for vehicular applications, on their computational, cost their accuracy and, most of all, on the amount of data they require for the training process. NN algorithms, for instance, require less data than Fuzzy logic ones, however they face more difficulties with nonlinear and complex systems [5]. The reviewed machine learning based methods are listed in Table 3 with their advantages and disadvantages.

Table 3. Machine-Learning estimation methods.

Methods	Key Advantages	Disadvantages
Support Vector Regression Algorithm [64,65]	<ul style="list-style-type: none"> ➤ Accurate ➤ Nonparametric ➤ Robust 	<ul style="list-style-type: none"> ➤ Depend heavily on the quality, the diversity and the quantity of the training data used ➤ Require a high performance controller
Fuzzy Logic [66]	<ul style="list-style-type: none"> ➤ Accurate ➤ Robust ➤ Applicable for nonlinear systems 	<ul style="list-style-type: none"> ➤ Depend heavily on the quality, the diversity and the quantity of the training data used ➤ Require a high performance controller
Neural Networks [62,68–70]	<ul style="list-style-type: none"> ➤ Accurate ➤ Requires less amount of data than Fuzzy Logic 	<ul style="list-style-type: none"> ➤ Depend heavily on the quality, the diversity and the quantity of the training data used ➤ Require a high-performance controller

The SOH estimation approach based on machine learning presents very interesting results with quite high accuracy. Yet, unless a significant amount of data from real electric vehicles and hybrid electric vehicles under different operating conditions and for different battery types are available, this estimation technique is hard to conduct. In order to make it feasible and realistic, a common database between several manufacturers needs to be shared with data from hundreds of thousands of vehicles.

5. Battery SOH Estimation Using Model-Based RLS Algorithm

Based on the qualitative comparison of SOH estimation methods, shown in Table 4, experimental-based methods appear to be difficult for real time BMS applications. On another hand, model-based and machine learning approaches benefit from a real-time onboard implementation that is required in automotive applications. Both these categories provide simple structures, accurate estimation and an easy implementation. However, machine learning-based methods depend on real electric vehicle and hybrid electric vehicle data which are not easily accessible yet. Moreover, they can become unreliable when confronting new operating conditions which have not been included in their training process [9,17]. Therefore, model-based SOH methods seem to be more practical. Among the discussed model-based methods, adaptive filtering provides interesting results in terms of accuracy, simplicity and computational feasibility; it meets the requirements of real-time applications. They use ECMs that allow a direct identification of the battery internal resistance [72]. This parameter is, as mentioned before, an SOH indicator. Compared to the battery capacity this SOH indicator can be reached directly using ECMs. Moreover, this indicator is of great interest in estimating the battery Power capability (SOP) [73] depending on its SOH, especially for hybrid applications, such as FC-HEV,

where the battery is the main power source and therefore its energy capacity is less relevant than its power. A variety of adaptive filters, such as the Kalman filter (KF), and recursive least square (RLS), have been utilized in this domain. When it comes to adaptive filtering based on a Kalman algorithm, it is more appropriate to use relatively complex versions, such as EKF or UKF rather than the classical KF in state estimation owing to the battery nonlinear behavior [39]. As mentioned in Section 3.1, the classical KF finds it difficult to face the nonlinear systems, therefore improved versions (EKF, UKF) have been developed and used for this purpose. On the other hand, an RLS algorithm combined with ECM has been the center of attention in many studies mainly due to its simplicity and satisfying accuracy. This algorithm provides a direct estimation of battery parameters, with high accuracy and low complexity. This estimation, on one hand, allows the SOH estimation through the battery internal resistance. On another hand, it improves the EMS in hybrid applications by updating all the model parameters. Consequently, among model-based estimation methods, the RLS algorithm is a good candidate to illustrate the real-time feasibility of this onboard SOH estimation. This adaptive filter is selected, based on its performances compared to the other methods, to present an example of battery SOH estimation for real time automotive applications.

Table 4. Qualitative comparison of the SOH estimation methods.

Category	Key Advantages	Drawbacks and Limitations
Experimental-based methods	<ul style="list-style-type: none"> ➤ High accuracy ➤ Low computational effort 	<ul style="list-style-type: none"> ➤ Require specific equipment to be conducted ➤ Most of the time the measurements are time consuming
Model-Based methods	<ul style="list-style-type: none"> ➤ Require a simple structure. ➤ Provide a relatively accurate and robust estimation. ➤ Provide fast processing and easy implementation. 	<ul style="list-style-type: none"> ➤ Require experimental pre-validation in the development phase of the process. ➤ Rely heavily on the model used in terms of accuracy and computational time.
Machine Learning methods	<ul style="list-style-type: none"> ➤ Provide a high accuracy estimation. ➤ Provide an easy implementation process. 	<ul style="list-style-type: none"> ➤ Rely heavily on the quality of the training data used and the operating conditions and battery types considered for these data. ➤ Rely on the model used in terms of accuracy and computational time.

To validate the performance and compatibility of this SOH identification method in real time vehicular applications, a series of tests are conducted in this section. First, using a battery simulated model, the battery internal resistance is identified online, and its value is compared to the model's one. Then an experimental test bench is setup to validate this identification process. The real battery resistance is measured using a highly accurate experimental method and used as a reference to validate the accuracy of the online identification process. A dynamic current profile is employed to highlight the compatibility of this SOH estimation method with real vehicular applications.

5.1. Simulation of Battery Internal Resistance Identification Using RLS Algorithm

In order to conduct the simulation study properly, an accurate battery model [74] used to reproduce the battery behavior is considered. The mathematical equations of the model are described as follows:

➤ Discharge model:

$$E_{batt} = E_0 - K \cdot \frac{Q}{Q - it} \cdot i^* - K \cdot \frac{Q}{Q - it} + A \cdot \exp(-B \cdot it) \tag{3}$$

➤ Charge model:

$$E_{batt} = E_0 - K \cdot \frac{Q}{0,1 \cdot Q + it} \cdot i^* - K \cdot \frac{Q}{Q - it} + A \cdot \exp(-B \cdot it) \tag{4}$$

where E_{batt} : Non-linear Voltage (V); E_0 : Constant Voltage (V); K : Polarization Resistance (Ω); i^* : Low frequency current (A); i : Battery current (A); it : Extracted capacity (Ah); Q : Maximum battery capacity (Ah); A : Exponential Voltage (V); B : Exponential Capacity (Ah^{-1}).

This dynamic model is simulated using the Matlab/Simulink software. The simulated model takes into account several battery parameters. The characteristics of this battery simulated model are given in Table 5. The identification process is described in in Figure 2.

Table 5. LiFePo4 simulated characteristics.

Parameters	Value
Nominal voltage	12.8 (V)
Nominal capacity	20 (Ah)
Internal resistance	6.4 (m Ω)

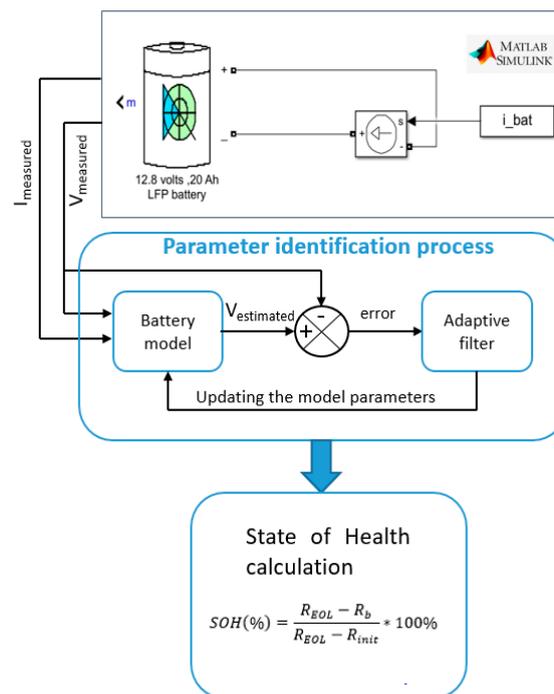


Figure 2. Online SOH estimation process.

Battery modeling is a key element in the online identification process. The more accurate the battery model used the more accurate the parameter identification will be. As a matter of fact, the identification process using an adaptive filter with a second order battery ECM will provide more accurate results in parameter estimation than the same adaptive filter used with a simple battery model (Zero Order ECM). Yet, complex models may lead to higher computational time. Battery ECMs are commonly used in model-based estimation methods. They are developed from internal battery parameters such as the resistance and the Open Circuit Voltage. The accuracy and complexity of these

ECMs are directly linked to their order. The first order battery ECM is dominant in the literature, its good compromise between accuracy and simplicity has been strongly proven [75].

The RLS algorithm is used with this first order ECM to identify in real time the battery parameters and specifically the internal resistance. This internal resistance is used as a health indicator to track the battery SOH in real time. This health indicator is chosen over the battery capacity due to the fact that it appears directly in the battery ECM parameters. This indicator is relevant when it comes to the power capability of the battery which is an important aspect to consider in EMS for HEV [11,76]. When it comes to identifying the battery capacity, more complex models are required (EM). The internal resistance of the battery is though a parameter that changes, as mentioned previously, permanently with aging but also in a reversible way with operating conditions. In order to be a relevant indicator of the battery SOH, the estimation of this parameter needs to be conducted under particular conditions. The value of this resistance tends to increase for SOC levels under 60% and with extreme temperatures (hot and cold ones). Therefore, in order to make sure that this estimated resistance adequately reflects the SOH level of the battery, these factors need to be controlled. The resistance estimation is required to be conducted at a temperature around 25 °C and for a SOC level higher than 70% (Which is often the case in hybrid applications). This way, the resistance value will only be influenced by the level of battery degradation and indicates adequately its SOH level.

The structure of this algorithm is the following:

$$V_{est}(k) = \hat{W}(k) * U(k) \quad (5)$$

$$E(k) = V_{meas}(k) - V_{est}(k) \quad (6)$$

$$\Delta \hat{W}(k) = G(k) * E(k) \quad (7)$$

$$G(k) = \frac{P(k-1) * U(k)}{\lambda + U^T(k) * P(k-1) * U(k)} \quad (8)$$

$$P(k) = \frac{1}{\lambda} * [P(k-1) - G(k) * U^T(k) * P(k-1)] \quad (9)$$

$$\hat{W}(k) = \hat{W}(k-1) + \Delta \hat{W}(k) \quad (10)$$

where $V_{est}(k)$ is the estimated function, $\hat{W}(k)$ is a vector of estimated parameters, $U(k)$ is a vector of known functions, $G(k)$ is the Kalman gain, $P(k)$ is the inverse correlation matrix of the input vector.

In the first order ECM, Figure 3, an RC network that represents the diffusion phenomenon is considered. Considering the battery behavior and the first order ECM, the battery internal resistance for this ECM is equal to $R_b = R_0 + R_1$.

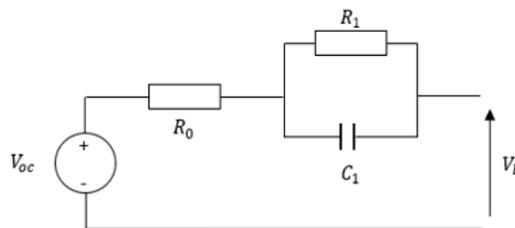


Figure 3. Battery first order Equivalent circuit model (ECM).

The identification process takes place as follows:

$$R_1 C \dot{V}_b - R_0 R_1 C \dot{I}_b + (R_1 + R_0) I_b + V_{oc} = V_{est} = U^T \cdot W \quad (11)$$

where I_b is the battery measured current, V_{est} the battery estimated voltage and W the estimated parameters that are in this case $R_1 + R_0$ that represent the battery internal resistance (R_b) and V_{oc} the battery open circuit voltage.

The internal resistance is identified in real time with the RLS filter for the three ECM using current and voltage measurement. The SOH is defined, as cited previously, as the ratio between the indicator current value and its initial one; in this case the indicator is the battery internal resistance identified by the RLS filter as shown in Equation (11).

$$SOH(\%) = \frac{R_{EOL} - R_b}{R_{EOL} - R_{init}} * 100\% \quad (12)$$

where R_{EOL} represents the battery end of life (EOL) internal resistance. This R_{EOL} is chosen as 160% of the initial battery internal resistance R_{init} , considering the fact that the battery end of life is indicated in several power applications by a decrease of 60% in its maximum power [77] R_b is the battery internal resistance estimated in real time.

First, the battery is discharged under a pulse current profile as shown in Figure 4. The RLS-based parameter identification is conducted in real time. The battery internal resistance estimation is also presented in Figure 4. Based on these simulations, it is clear that the parameter identification process is functional. The battery internal resistance is estimated accurately. The short convergence time of this identification (~20 s) its accuracy and its low computational cost, as shown in the simulation results, meet the requirements of real time applications. By considering these results, it can be concluded that the Model-Based SOH estimation method using the RLS adaptive filter is functional and adequate for a real time application. This method estimates the battery internal resistance with a high accuracy and with a low convergence time (less than 40 s).

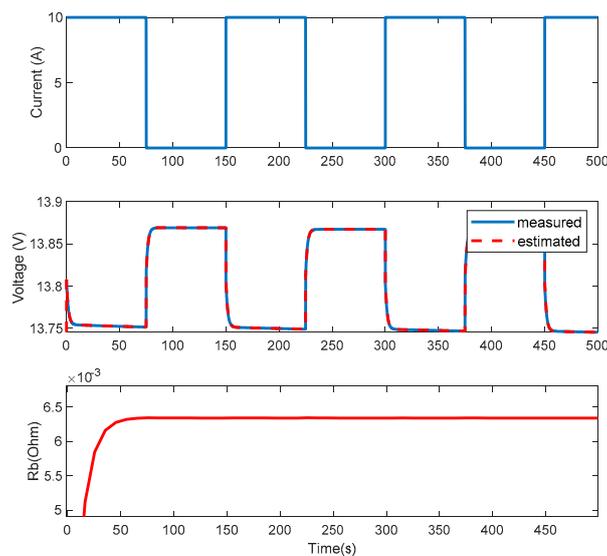


Figure 4. Battery internal resistance identification under constant pulse current (simulation).

The battery simulated is considered new with an SOH equal to one. To shed light on the validity of this identification process, an aged battery is used in the simulation presented in Figure 5. The internal resistance is identified accurately with a value of 0.0085Ω . This resistance leads, using the Equation (3), to an SOH estimation of 0.45 (45%). The battery degradation level is estimated here using the SOH indicator identified in real time.

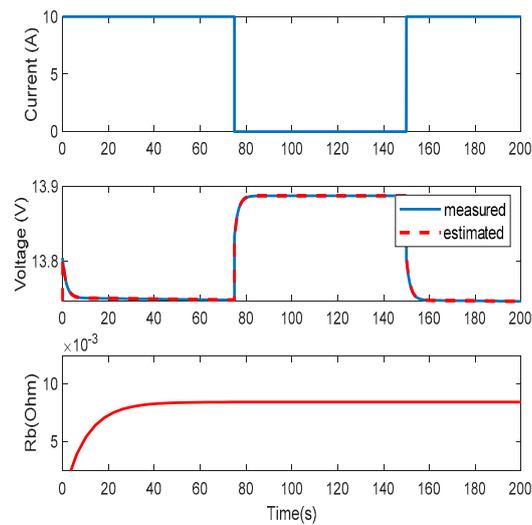


Figure 5. Battery SOH estimation with an aged LiFePo4 battery (simulation).

In order to cope with the requirements of real transportation applications, the identification process is simulated under a dynamic current profile. This current profile corresponds to a real driving cycle provided in [78] and shown in Figure 6. The simulated battery model is discharged under the dynamic profile current corresponding to this driving cycle and the internal resistance is estimated using the three battery ECM. The results of this estimation are presented in Figure 6. Once again, the simulation results show that the Model-based SOH estimation method using the RLS adaptive filter functions well and is suited for real time SOH estimation. Even with a dynamic current profile, the estimation is accurate and the battery ECM is simple and easy to implement for real time applications.

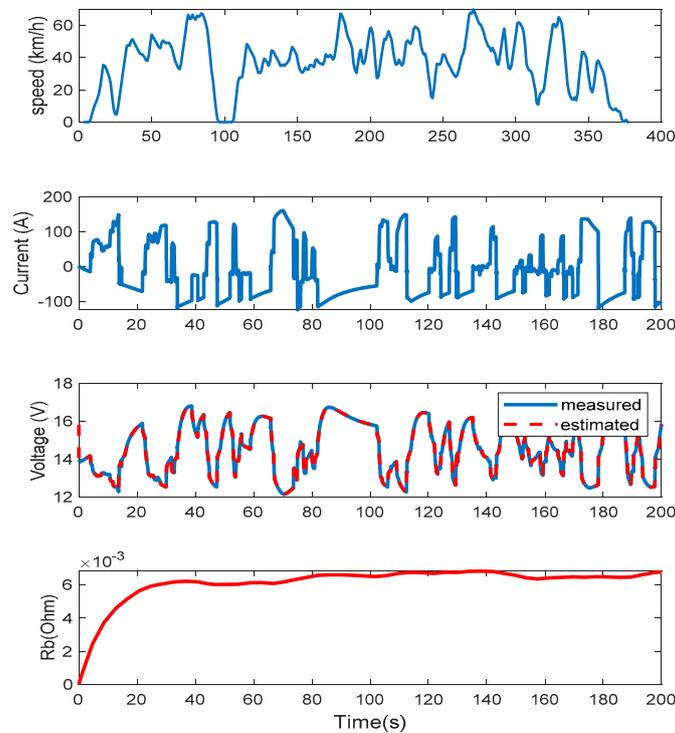


Figure 6. Battery internal resistance identification under a dynamic current profile (simulation).

5.2. Experimental Validation of the SOH Estimation Process

In order to validate these results and make sure that the proposed online identification process works adequately, an experimental test is required. The battery SOH will be estimated through the battery internal resistance online identification. A real LiFePo4 lithium ion battery is considered. The test bench set up at the Hydrogen Research Institute is presented in Figure 7.

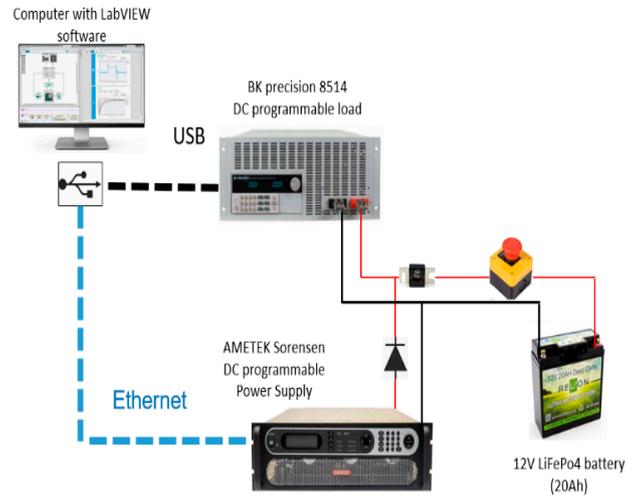


Figure 7. Experimental Test Bench.

First the battery internal resistance is measured experimentally using the current pulse method. This method is based on the Ohm's Law. It measures the voltage drop of the battery for a given current, and then calculates the battery's internal resistance, as follows [24]:

$$R_b(SOC, T) = \frac{OCV(SOC, T) - V_{bat}(SOC, T)}{I_{pulse}} \quad (13)$$

where R_b stands for the battery internal resistance, OCV its Open Circuit Voltage, V_{bat} its voltage and I_{pulse} the current applied. This method is widely used in laboratories to define the battery internal resistance behavior in different working conditions with a very high accuracy. Even though this experimental method is known to be very time consuming, it provides highly accurate resistance measurements and will represent the reference in the validation of the online battery SOH estimation process.

The battery internal resistance is measured using the current pulse method, 10 A pulses are considered and the relaxation time to reach the equilibrium for the OCV measurement is one hour. The ambient temperature for this experiment is constant and equal to 21 °C. The measured internal resistance is presented in Figure 8. In automotive applications and especially Hybrid Electric Vehicles, the battery SOC is limited most of the time to use between 90% and 50%. For this SOC range, the battery internal resistance appears to be constant and its measured value is approximately 0.05 Ω.

This measured value is considered the reference for the online battery internal resistance identification. The LiFeP04 lithium ion battery is now discharged with a constant current profile. This profile takes into consideration current pulses of 10 A. Its voltage and current are measured in real time and used with the adaptive filtering method to identify the battery internal resistance. The identification process is carried out experimentally and the results are shown in Figure 9. The battery internal resistance value estimated with the online identification process matches with the reference measured value. The convergence time in this test is quite important due to the lack of information received by the RLS algorithm. The current pulse is short, therefore the accurate resistance value is only reached after the second pulse.

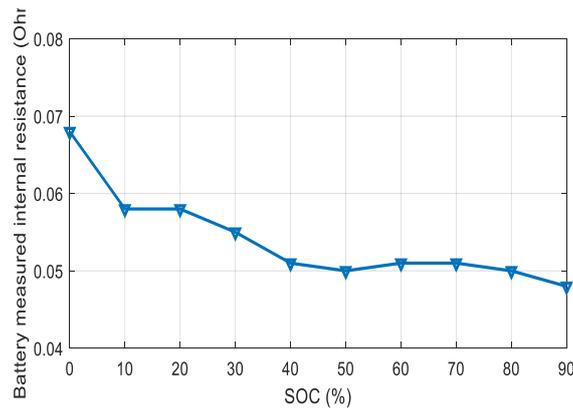


Figure 8. Battery internal resistance experimental measurement.

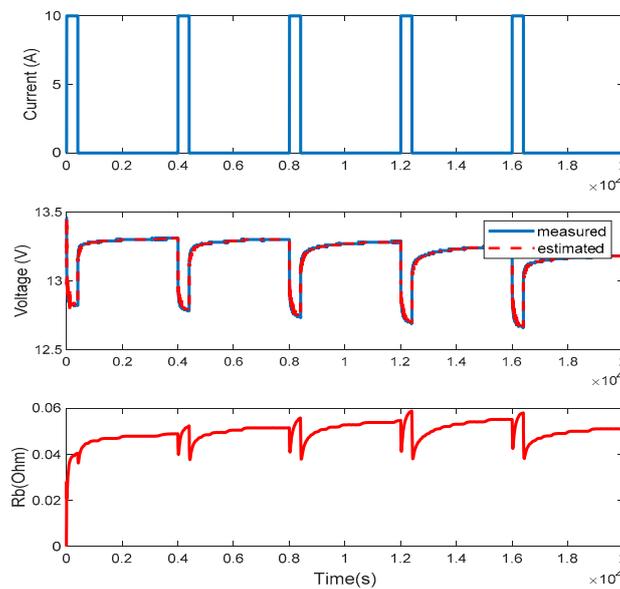


Figure 9. Battery internal resistance identification under constant current (experimental).

In order to give pertinent results that cope with real automotive applications, this identification process is experimentally tested under a real driving cycle, as shown in Figure 6. The LiFePo4 lithium ion battery is considered with an initial SOC of 70%. The ambient temperature is the same as for the reference internal resistance measurement, 21 °C. The results of this experimental validation are presented in Figure 10. The identification process is able to estimate the battery internal resistance with high accuracy and under a low convergence time. The estimated value for the internal resistance meets the measured one, 0.05 Ω. This value was reached after only 50 s of convergence. This duration is very satisfying in SOH estimation considering the slow variation of the internal resistance with battery aging.

The identification results indicate the aptitude of the model-based estimation method using the RLS filter to identify the battery internal resistance in real time. This resistance represents an important SOH indicator. Its current identified value is used to estimate the SOH as follows:

$$SOH(\%) = \frac{R_{EOL} - R_b}{R_{EOL} - R_{init}} * 100\% \tag{14}$$

The R_b identified by the online estimation process is equal to R_{init} . In fact, the battery considered is a new one, therefore its SOH is 100%. In case of degradation due to aging, the identified value of R_b will increase which will lead to a lower SOH estimation.

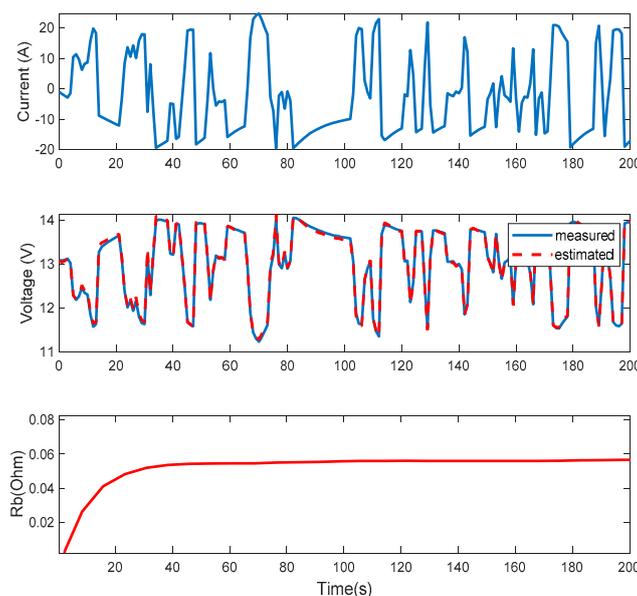


Figure 10. Battery internal resistance estimation under dynamic current (experimental).

6. Conclusions

In this paper, a review of the main battery SOH estimation methods suited for automotive real time applications, and especially hybrid electric ones, is given. Different indicators that allow SOH estimation are presented. Battery internal resistance is an indicator of great interest in terms of hybrid applications. This indicator reflects the battery degradation related to its power capability. The main categories of estimation methods, experimental methods, model-based methods and machine learning methods are presented and compared based on their key advantages and limitations in terms of real time automotive applications. Due to their accuracy and compatibility with on-board and online applications, model-based methods are highlighted. They present a satisfying accuracy in terms of real time SOH indicator identification. The effective functioning of these method and their compatibility with real time applications are shown through experimental testing. Using the RLS adaptive filter as an example of a model-based estimation method associated with a first order battery ECM, the battery internal resistance is identified. For both constant and dynamic current profiles, experimental results for the real time identification are very accurate.

This review provides the latest research achievements in terms of real-time battery SOH estimation. Future works on energy management strategies for hybrid vehicles can consider these real time estimation methods to keep track of battery model parameters in real-time and improve the system's performances and lifetime.

Author Contributions: Conceptualization, N.N., L.B. and S.J.; methodology, N.N, L.B and S.J.; software, N.N.; validation, N.N., L.B. and S.J.; formal analysis, N.N.; writing—original draft preparation, N.N., L.B. and S.J.; writing—review and editing, N.N., L.B. and S.J.; supervision, L.B. and S.J.; funding acquisition, L.B. and S.J. All authors have read and agreed to the published version of the manuscript.

Funding: This work was supported by the Canada Research Chairs program (950-230863) and by the EIPHI Graduate school (contract “ANR-17-EURE-0002”) and the Region Bourgogne Franche-Comté.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Armand, M.; Tarascon, J.M. Building better batteries. *Nature* **2008**, *451*, 652–657. [[CrossRef](#)]
2. Li, Z.; Khajepour, A.; Song, J. A comprehensive review of the key technologies for pure electric vehicles. *Energy* **2019**, *182*, 824–839. [[CrossRef](#)]

3. Research, T.M. Lithium-ion Batteries Market Global Industry ANalysis, Size, Share, Growth, Trends and Forecast 2019–2027. *BCC Res.* **2019**.
4. Vetter, J.; Novák, P.; Wagner, M.; Veit, C.; Möller, K.-C.; Besenhard, J.; Winter, M.; Wohlfahrt-Mehrens, M.; Vogler, C.; Hammouche, A. Ageing mechanisms in lithium-ion batteries. *J. Power Sources* **2005**, *147*, 269–281. [[CrossRef](#)]
5. Berecibar, M.; Gandiaga, I.; Villarreal, I.; Omar, N.; van Mierlo, J.; van den Bossche, P. Critical review of state of health estimation methods of Li-ion batteries for real applications. *Renew. Sustain. Energy Rev.* **2016**, *56*, 572–587. [[CrossRef](#)]
6. Xiong, R.; Cao, J.; Yu, Q.; He, H.; Sun, F. Critical Review on the Battery State of Charge Estimation Methods for Electric Vehicles. *IEEE Access* **2018**, *6*, 1832–1843. [[CrossRef](#)]
7. Esfandyari, M.J.; Yazdi, M.R.H.; Esfahanian, V.; Masih-Tehrani, M.; Nehzati, H.; Shekoofa, O. A hybrid model predictive and fuzzy logic based control method for state of power estimation of series-connected Lithium-ion batteries in HEVs. *J. Energy Storage* **2019**, *24*, 100758. [[CrossRef](#)]
8. Waag, W.; Fleischer, C.; Sauer, D. Adaptive on-line prediction of the available power of lithium-ion batteries. *J. Power Sources* **2013**, *242*, 548–559. [[CrossRef](#)]
9. Hu, X.; Feng, F.; Liu, K.; Zhang, L.; Xie, J.; Liu, B. State estimation for advanced battery management: Key challenges and future trends. *Renew. Sustain. Energy Rev.* **2019**, *114*, 109334. [[CrossRef](#)]
10. Wang, X.; Wei, X.; Dai, H. Estimation of state of health of lithium-ion batteries based on charge transfer resistance considering different temperature and state of charge. *J. Energy Storage* **2019**, *21*, 618–631. [[CrossRef](#)]
11. Noura, N.; Boulon, L.; Jemei, S. An Online Identification Based Energy Management Strategy for a Fuel Cell Hybrid Electric Vehicle. In Proceedings of the 2019 IEEE Vehicle Power and Propulsion Conference (VPPC), Hanoi 2019, Hanoi, Vietnam, 14–17 October 2019.
12. Jagemont, J.; Boulon, L.; Dubé, Y. A comprehensive review of lithium-ion batteries used in hybrid and electric vehicles at cold temperatures. *Appl. Energy* **2016**, *164*, 99–114. [[CrossRef](#)]
13. Xu, M.; Reichman, B.; Wang, X. Modeling the effect of electrode thickness on the performance of lithium-ion batteries with experimental validation. *Energy* **2019**, *186*, 115864. [[CrossRef](#)]
14. Chang, C.-C.; Huang, S.-Y.; Chen, W.-H. Thermal and solid electrolyte interphase characterization of lithium-ion battery. *Energy* **2019**, *174*, 999–1011. [[CrossRef](#)]
15. Spotnitz, R. Simulation of capacity fade in lithium-ion batteries. *J. Power Sources* **2003**, *113*, 72–80. [[CrossRef](#)]
16. Xiong, R.; Li, L.; Tian, J. Towards a smarter battery management system: A critical review on battery state of health monitoring methods. *J. Power Sources* **2018**, *405*, 18–29. [[CrossRef](#)]
17. Meng, H.; Li, Y.-F. A review on prognostics and health management (PHM) methods of lithium-ion batteries. *Renew. Sustain. Energy Rev.* **2019**, *116*, 109405. [[CrossRef](#)]
18. Li, Y.; Liu, K.; Foley, A.M.; Zülke, A.; Berecibar, M.; Nanini-Maury, E.; Van Mierlo, J.; Hoster, H.E. Data-driven health estimation and lifetime prediction of lithium-ion batteries: A review. *Renew. Sustain. Energy Rev.* **2019**, *113*, 109254. [[CrossRef](#)]
19. Farmann, A.; Waag, W.; Marongiu, A.; Sauer, D.U. Critical review of on-board capacity estimation techniques for lithium-ion batteries in electric and hybrid electric vehicles. *J. Power Sources* **2015**, *281*, 114–130. [[CrossRef](#)]
20. Rezvanizani, S.M.; Liu, Z.; Chen, Y.; Lee, J. Review and recent advances in battery health monitoring and prognostics technologies for electric vehicle (EV) safety and mobility. *J. Power Sources* **2014**, *256*, 110–124. [[CrossRef](#)]
21. Wang, K.; Gao, F.; Zhu, Y.; Liu, H.; Qi, C.; Yang, K.; Jiao, Q. Internal resistance and heat generation of soft package $\text{Li}_4\text{Ti}_5\text{O}_{12}$ battery during charge and discharge. *Energy* **2018**, *149*, 364–374. [[CrossRef](#)]
22. Wei, X.; Zhu, B.; Xu, W. Internal Resistance Identification in Vehicle Power Lithium-Ion Battery and Application in Lifetime Evaluation. In Proceedings of the 2009 International Conference on Measuring Technology and Mechatronics Automation, Zhangjiajie, China, 11–12 April 2009; Volume 3, pp. 388–392.
23. Sajfar, I.; Malaric, M.; Bullough, R.P. Sealed batteries in transient limiting distribution networks-methods of measuring their internal resistance. In Proceedings of the 12th International Conference on Telecommunications Energy, Orlando, FL, USA, 22–25 October 1990; pp. 458–463.
24. Chaoui, H.; Gualous, H. Online parameter and state estimation of lithium-ion batteries under temperature effects. *Electr. Power Syst. Res.* **2017**, *145*, 73–82. [[CrossRef](#)]

25. Schweiger, H.-G.; Obeidi, O.; Komesker, O.; Raschke, A.; Schiemann, M.; Zehner, C.; Gehnen, M.; Keller, M.; Birke, P. Comparison of Several Methods for Determining the Internal Resistance of Lithium Ion Cells. *Sensors* **2010**, *10*, 5604–5625. [[CrossRef](#)]
26. Piłatowicz, G.; Marongiu, A.; Drillkens, J.; Sinhuber, P.; Sauer, D.U. A critical overview of definitions and determination techniques of the internal resistance using lithium-ion, lead-acid, nickel metal-hydride batteries and electrochemical double-layer capacitors as examples. *J. Power Sources* **2015**, *296*, 365–376. [[CrossRef](#)]
27. Galeotti, M.; Cinà, L.; Giammanco, C.; Cordiner, S.; di Carlo, A. Performance analysis and SOH (state of health) evaluation of lithium polymer batteries through electrochemical impedance spectroscopy. *Energy* **2015**, *89*, 678–686. [[CrossRef](#)]
28. Cui, Y.; Zuo, P.; Du, C.; Gao, Y.; Yang, J.; Cheng, X.; Ma, Y.; Yin, G. State of health diagnosis model for lithium ion batteries based on real-time impedance and open circuit voltage parameters identification method. *Energy* **2018**, *144*, 647–656. [[CrossRef](#)]
29. Pastor-Fernández, C.; Widanage, W.D.; Marco, J.; Gama-Valdez, M.; Chouchelamane, G.H. Identification and quantification of ageing mechanisms in Lithium-ion batteries using the EIS technique. In Proceedings of the 2016 IEEE Transportation Electrification Conference and Expo (ITEC), Dearborn, MI, USA, 27–29 June 2016; pp. 1–6.
30. Ovejas, V.; Cuadras, A. Impedance Characterization of an LCO-NMC/Graphite Cell: Ohmic Conduction, SEI Transport and Charge-Transfer Phenomenon. *Batteries* **2018**, *4*, 43. [[CrossRef](#)]
31. Din, E.; Schaef, C.; Moffat, K.; Stauth, J.T. A Scalable Active Battery Management System with Embedded Real-Time Electrochemical Impedance Spectroscopy. *IEEE Trans. Power Electron.* **2017**, *32*, 5688–5698. [[CrossRef](#)]
32. Li, X.; Wang, Z.; Zhang, L.; Zou, C.; Dorrell, D.D. State-of-health estimation for Li-ion batteries by combing the incremental capacity analysis method with grey relational analysis. *J. Power Sources* **2019**, *410–411*, 106–114. [[CrossRef](#)]
33. Xiong, R.; Zhang, Y.; Wang, J.; He, H.; Peng, S.; Pecht, M. Lithium-Ion Battery Health Prognosis Based on a Real Battery Management System Used in Electric Vehicles. *IEEE Trans. Veh. Technol.* **2019**, *68*, 4110–4121. [[CrossRef](#)]
34. Zheng, L.; Zhu, J.; Lu, D.D.-C.; Wang, G.; He, T. Incremental capacity analysis and differential voltage analysis based state of charge and capacity estimation for lithium-ion batteries. *Energy* **2018**, *150*, 759–769. [[CrossRef](#)]
35. Li, X.; Yuan, C.; Li, X.; Wang, Z. State of health estimation for Li-Ion battery using incremental capacity analysis and Gaussian process regression. *Energy* **2020**, *190*, 116467. [[CrossRef](#)]
36. Stroe, D.; Schaltz, E. Lithium-Ion Battery State-of-Health Estimation Using the Incremental Capacity Analysis Technique. *IEEE Trans. Ind. Appl.* **2020**, *56*, 678–685. [[CrossRef](#)]
37. D’Orazio, T.; Leo, M.; Distante, A.; Guaragnella, C.; Pianese, V.; Cavaccini, G. Automatic ultrasonic inspection for internal defect detection in composite materials. *NDT E Int.* **2008**, *41*, 145–154. [[CrossRef](#)]
38. Kostecki, R.; McLarnon, F. Microprobe study of the effect of Li intercalation on the structure of graphite. *J. Power Sources* **2003**, *119–121*, 550–554. [[CrossRef](#)]
39. Zhu, Q.; Xu, M.; Liu, W.; Zheng, M. A state of charge estimation method for lithium-ion batteries based on fractional order adaptive extended kalman filter. *Energy* **2019**, *187*, 115880. [[CrossRef](#)]
40. Shen, P.; Ouyang, M.; Lu, L.; Li, J.; Feng, X. The Co-estimation of State of Charge, State of Health, and State of Function for Lithium-Ion Batteries in Electric Vehicles. *IEEE Trans. Veh. Technol.* **2018**, *67*, 92–103. [[CrossRef](#)]
41. Kim, J.; Cho, B.H. State-of-Charge Estimation and State-of-Health Prediction of a Li-Ion Degraded Battery Based on an EKF Combined With a Per-Unit System. *IEEE Trans. Veh. Technol.* **2011**, *60*, 4249–4260. [[CrossRef](#)]
42. Omariba, Z.B.; Zhang, L.; Kang, H.; Sun, D. Parameter Identification and State Estimation of Lithium-Ion Batteries for Electric Vehicles with Vibration and Temperature Dynamics. *World Electr. Veh. J.* **2020**, *11*, 50. [[CrossRef](#)]
43. Plett, G.L. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 1. Background. *J. Power Sources* **2004**, *134*, 252–261. [[CrossRef](#)]
44. Plett, G. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs. *J. Power Sources* **2004**, *134*, 262–276. [[CrossRef](#)]

45. Plett, G.L. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 3. State and parameter estimation. *J. Power Sources* **2004**, *134*, 277–292. [[CrossRef](#)]
46. Chen, N.; Hu, X.; Gui, W.; Zou, J. Estimation of li-ion battery state of charging and state of healthy based on unsented Kalman filtering. In Proceedings of the 26th Chinese Control and Decision Conference (2014 CCDC), Changsha, China, 31 May–2 June 2014; pp. 4725–4729.
47. Rozaqi, L.; Rijanto, E.; Kanarachos, S. Comparison between RLS-GA and RLS-PSO for Li-ion Battery SOC and SOH Estimation: A Simulation Study. *J. Mechatron. Electr. Power Veh. Technol.* **2017**, *8*, 40–49. [[CrossRef](#)]
48. Rijanto, E.; Rozaqi, L.; Nugroho, A.; Kanarachos, S. RLS with optimum multiple adaptive forgetting factors for SoC and SoH estimation of Li-Ion battery. In Proceedings of the 2017 5th International Conference on Instrumentation, Control, and Automation (ICA), Yogyakarta, Indonesia, 9–11 August 2017; pp. 73–77.
49. Herdjunanto, S. Estimation of Open Circuit Voltage and electrical parameters of a battery based on signal processed by Recursive Least Square method using two separate forgetting factors. In Proceedings of the 2016 6th International Annual Engineering Seminar (InAES), Yogyakarta, Indonesia, 1–3 August 2016; pp. 67–71.
50. de Ketelaere, B.; Saelens, H.; Wulteputte, L.; Anthonis, J. Nozzle Fault Detection Using Recursive Least Squares. Presented at ILASS Americas, 20th Annual Conference on Liquid Atomization and Spray Systems, Chicago, IL, USA, 15–18 May 2007.
51. Fortescue, T.R.; Kershenbaum, L.S.; Ydstie, B.E. Implementation of self-tuning regulators with variable forgetting factors. *Automatica* **1981**, *17*, 831–835. [[CrossRef](#)]
52. He, H.; Zhang, X.; Xiong, R.; Xu, Y.; Guo, H. Online model-based estimation of state-of-charge and open-circuit voltage of lithium-ion batteries in electric vehicles. *Energy* **2012**, *39*, 310–318. [[CrossRef](#)]
53. Ning, B.; Cao, B.; Wang, B.; Zou, Z. Adaptive sliding mode observers for lithium-ion battery state estimation based on parameters identified online. *Energy* **2018**, *153*, 732–742. [[CrossRef](#)]
54. Kim, I.S. A technique for estimating the state of health of lithium batteries through a dual-sliding-mode observer. *IEEE Trans. Power Electron.* **2010**, *25*, 1013–1022.
55. Jagemont, J.; Boulon, L.; Dubé, Y. Characterization and Modeling of a Hybrid-Electric-Vehicle Lithium-Ion Battery Pack at Low Temperatures. *IEEE Trans. Veh. Technol.* **2016**, *65*, 1–14. [[CrossRef](#)]
56. Prasad, G.K.; Rahn, C.D. Model based identification of aging parameters in lithium ion batteries. *J. Power Sources* **2013**, *232*, 79–85. [[CrossRef](#)]
57. Peng, R.; Pedram, M. An analytical model for predicting the remaining battery capacity of lithium-ion batteries. *IEEE Trans. Very Large Scale Integr. (VLSI) Syst.* **2006**, *14*, 441–451. [[CrossRef](#)]
58. Chen, Z.; Mi, C.C.; Fu, Y.; Xu, J.; Gong, X. Online battery state of health estimation based on Genetic Algorithm for electric and hybrid vehicle applications. *J. Power Sources* **2013**, *240*, 184–192. [[CrossRef](#)]
59. Cai, Y.; Yang, L.; Deng, Z.; Zhao, X.; Deng, H. Online identification of lithium-ion battery state-of-health based on fast wavelet transform and cross D-Markov machine. *Energy* **2018**, *147*, 621–635. [[CrossRef](#)]
60. Cheng, Y.; Lu, C.; Li, T.; Tao, L. Residual lifetime prediction for lithium-ion battery based on functional principal component analysis and Bayesian approach. *Energy* **2015**, *90*, 1983–1993. [[CrossRef](#)]
61. Deng, Y.; Ying, H.E.J.; Zhu, H.; Wei, K.; Chen, J.; Zhang, F.; Liao, G. Feature parameter extraction and intelligent estimation of the State-of-Health of lithium-ion batteries. *Energy* **2019**, *176*, 91–102. [[CrossRef](#)]
62. Pan, H.; Lü, Z.; Wang, H.; Wei, H.; Chen, L. Novel battery state-of-health online estimation method using multiple health indicators and an extreme learning machine. *Energy* **2018**, *160*, 466–477. [[CrossRef](#)]
63. Yue, M.; Jemei, S.; Gouriveau, R.; Zerhouni, N. Review on Health-Conscious Energy Management Strategies for Fuel Cell Hybrid Electric Vehicles: Degradation Models and Strategies. *Int. J. Hydrogen Energy* **2019**, *44*, 6844–6861. [[CrossRef](#)]
64. Yue, M.; Jemei, S.; Gouriveau, R.; Zerhouni, N. Developing a Health-Conscious Energy Management Strategy Based on Prognostics for a Battery/Fuel Cell Hybrid Electric Vehicle. In Proceedings of the 2018 IEEE Vehicle Power and Propulsion Conference (VPPC), Chicago, IL, USA, 27–30 August 2018; pp. 1–6. [[CrossRef](#)]
65. Tan, X.; Tan, Y.; Zhan, D.; Yu, Z.; Fan, Y.; Qiu, J.; Li, J. Real-Time State-of-Health Estimation of Lithium-Ion Batteries Based on the Equivalent Internal Resistance. *IEEE Access* **2020**, *8*, 56811–56822. [[CrossRef](#)]
66. Singh, P.; Kaneria, S.; Broadhead, J.; Wang, X.; Burdick, J. Fuzzy logic estimation of SOH of 125Ah VRLA batteries. In Proceedings of the INTELEC 2004, 26th Annual International Telecommunications Energy Conference, Chicago, IL, USA, 19–23 September 2004; pp. 524–531.

67. Khaleghi, S.; Firouz, Y.; van Mierlo, J.; van den Bossche, P. Developing a real-time data-driven battery health diagnosis method, using time and frequency domain condition indicators. *Appl. Energy* **2019**, *255*, 113813. [[CrossRef](#)]
68. Yang, Q.; Xu, J.; Li, X.; Xu, D.; Cao, B. State-of-health estimation of lithium-ion battery based on fractional impedance model and interval capacity. *Int. J. Electr. Power Energy Syst.* **2020**, *119*, 105883. [[CrossRef](#)]
69. Eddahech, A.; Briat, O.; Bertrand, N.; Delétage, J.-Y.; Vinassa, J.-M. Behavior and state-of-health monitoring of Li-ion batteries using impedance spectroscopy and recurrent neural networks. *Int. J. Electr. Power Energy Syst.* **2012**, *42*, 487–494. [[CrossRef](#)]
70. Li, P.; Zhang, Z.; Xiong, Q.; Ding, B.; Hou, J.; Luo, D.; Rong, Y.; Li, S. State-of-health estimation and remaining useful life prediction for the lithium-ion battery based on a variant long short term memory neural network. *J. Power Sources* **2020**, *459*, 228069. [[CrossRef](#)]
71. Tang, X.; Liu, K.; Wang, X.; Liu, B.; Gao, F.; Widanage, W.D. Real-time aging trajectory prediction using a base model-oriented gradient-correction particle filter for Lithium-ion batteries. *J. Power Sources* **2019**, *440*, 227118. [[CrossRef](#)]
72. Chaoui, H.; Mandalapu, S. Comparative Study of Online Open Circuit Voltage Estimation Techniques for State of Charge Estimation of Lithium-Ion Batteries. *Batteries* **2017**, *3*, 12. [[CrossRef](#)]
73. Farmann, A.; Sauer, D.U. A comprehensive review of on-board State-of-Available-Power prediction techniques for lithium-ion batteries in electric vehicles. *J. Power Sources* **2016**, *329*, 123–137. [[CrossRef](#)]
74. Tremblay, O.; Dessaint, L.A. Experimental validation of a battery dynamic model. *World Electr. Veh. J.* **2009**, *3*, 1–10.
75. Hu, X.; Li, S.; Peng, H. A comparative study of equivalent circuit models for Li-ion batteries. *J. Power Sources* **2012**, *198*, 359–367. [[CrossRef](#)]
76. Ettahir, K.; Boulon, L.; Agbossou, K. Optimization-Based Energy Management Strategy for a Fuel Cell/Battery Hybrid Power System. *Appl. Energy* **2016**, *163*, 142–153. [[CrossRef](#)]
77. Gholizadeh, M.; Salmasi, F. Estimation of State of Charge, Unknown Nonlinearities, and State of Health of a Lithium-Ion Battery Based on a Comprehensive Unobservable Model. *IEEE Trans. Ind. Electron.* **2014**, *61*, 1335–1344. [[CrossRef](#)]
78. Depature, C.; Jemei, S.; Boulon, L.; Bouscayrol, A.; Marx, N.; Morando, S.; Castaings, A. Energy Management in Fuel-Cell/Battery Vehicles: Key Issues Identified in the IEEE Vehicular Technology Society Motor Vehicle Challenge 2017. *IEEE Veh. Technol. Mag.* **2018**, *13*, 144–151. [[CrossRef](#)]

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



© 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).